


GE 251 PP LF

Immersion assembly

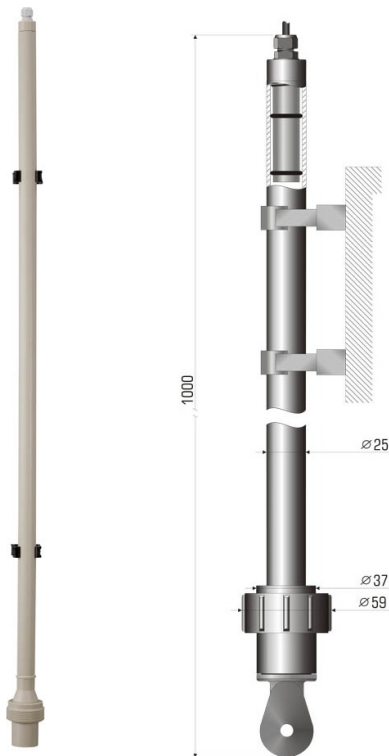

- Fitting head with cable gland
- Easy access to sensor
- Fastening with pipe clamps

description

Immersion assembly for installation of the conductivity sensor IL 15 or LE 44 Pt 4 SCR CM

technical data

ambient conditions

temperature

max. 90 °C

mechanical construction

material

PP

dimensions

see dimensional drawing

