



Mini Pressure Transmitters

Anderson's HA "Mini" sanitary pressure transmitter is specifically designed for critical measurements in fractional size lines and is available with an autoclaveable option. The product can be ordered with 3/4", 1", or 1-1/2" Tri-Clamp® connections as well as our CPM fitting. This eliminates the need for reducers or adapters, thus reducing hold-up volumes in small lines. Internal zero and span adjustments and easily accessible test points greatly simplify calibration and validation. 316 "L" stainless steel wetted parts are electro-polished to an $R_a=8$. Finally, since it's an Anderson "Pharmaceutical Series" product, every transmitter includes a calibration certificate and permanent tag at no charge. Complete specifications appear below, with an ordering matrix and dimensions on the reverse.



SPECIFICATIONS

Excitation:

10-40 VDC (Absolute), 24 VDC Nominal regulated or unregulated

Output:

4-20 mA DC, 2 wire with non-interrupting circuit verification test points

Loop Resistance:

0-700 ohms at 24 VDC

Wiring Connection:

16 AWG max.; Screw Terminal; Accessible via removable screw cap conduit housing

Recommended Cable:

22-24 AWG, foil shielded, and PVC coated.
(3/16 - 1/4 OD insulation)

Accuracy:

± 0.5% of full scale

Repeatability:

± 0.3% of full scale

Hysteresis:

± 0.10% of full scale

Linearity:

±0.10% of full scale

Stability:

±0.30% of calibrated range/6 months

Storage Temperature:

-40°C to 65°C (-40°F to 149°F)

Process Temperature Limits:

-1°C to 149°C (30°F to 300°F)
(Horizontal Mount recommended over 135°C (275°F))

Ambient Temperature Limits:

-18°C to 49°C (0°F to 120°F)

Effect of Temperature Change:

± 0.1 psig/5.5°C (10°F) typical

Over-Range Rating:

2 times base range

Response Time:

200 µSec

Wetted Parts:

316L stainless steel electropolished
(R_a max. = 8 microinches, .2 microns)

Housing Material:

304 stainless steel
Rating: NEMA 4x, IP66

Zero and Span Adjustments:

± 10% of range

Mounting:

Direct connection

Electrical Ratings:

Intrinsically safe for use in
Class 1, Div. 1, Groups A-D; CE Compliant
(EMC Industrial Locations)


Standards:

Designed and manufactured to sound engineering
practices in accordance with Article 3.3 of the
PED 97/23/EC


Autoclaveable Specifications(Optional):

Contact Anderson for more information.

Complete Product Ordering Matrix

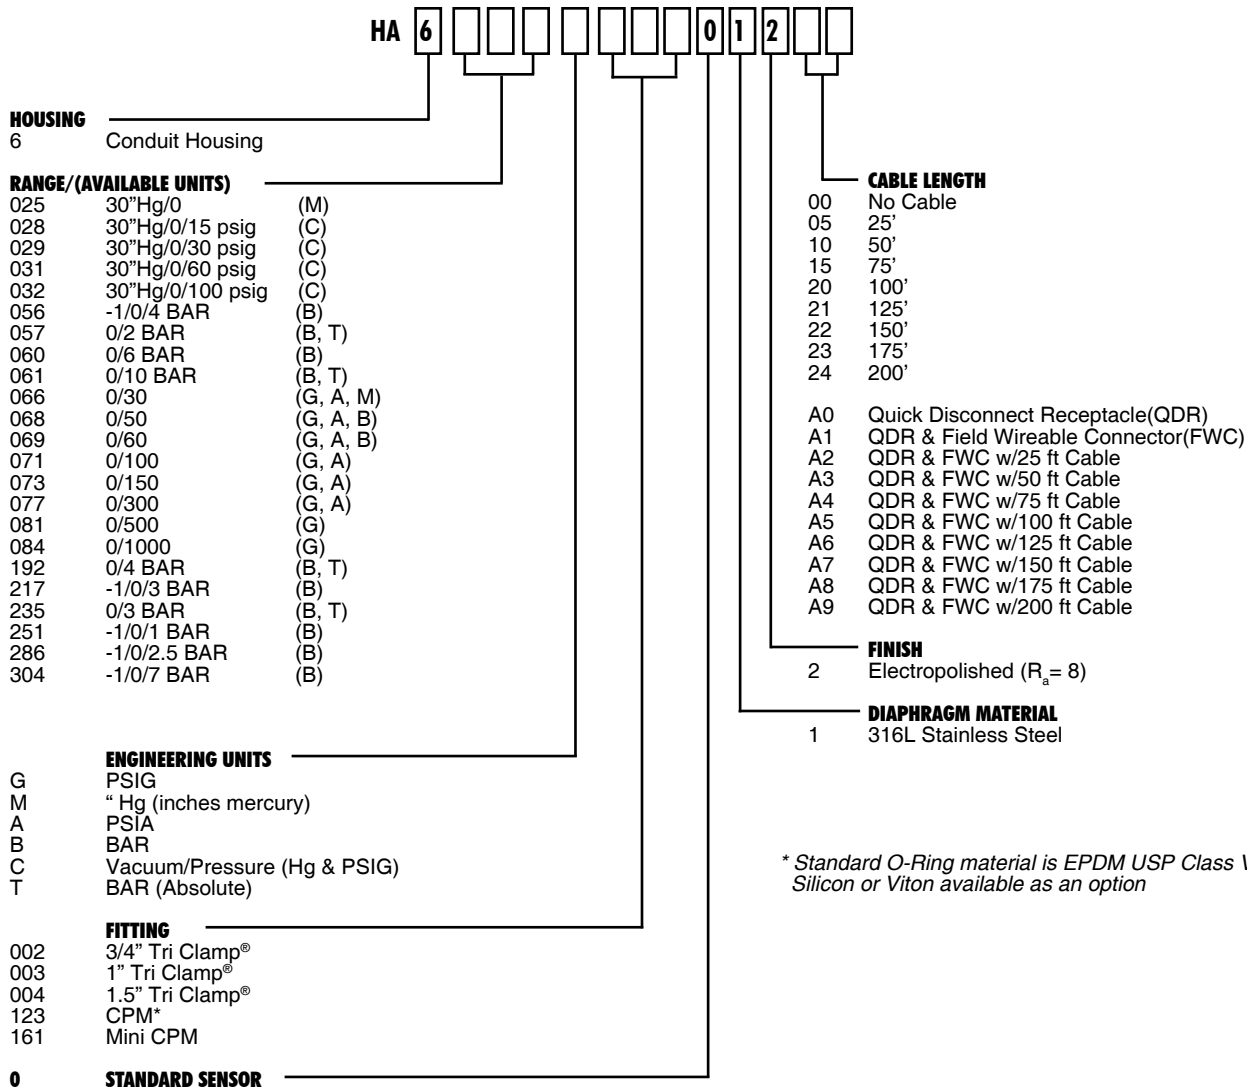

* Standard O-Ring material is EPDM USP Class VI
Silicon or Viton available as an option

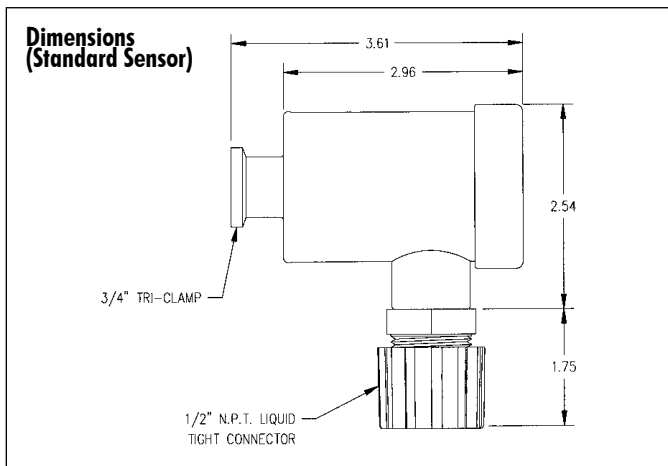

Form#5003 © 12/97
Revised: 3/07
Supercedes: 11/06

ANDERSON INSTRUMENT CO., INC. • 156 AURIESVILLE RD. • FULTONVILLE, NY 12072 • USA • 800 833-0081 • FAX 516-922-8997
ANDERSON INSTRUMENT CO. LP • 400 BRITANNIA RD. EAST, UNIT 1 • MISSISSAUGA, ONTARIO L4Z 1X9 • CANADA • 905-568-1440 • FAX 905-568-1652
NEGELE MESSTECHNIK GmbH (A Division of Anderson) • RAIFFEISENWEG 7 • D-87743 EGG A. D. GÜNZ • GERMANY • +49 (0) 8333/9204-0 • FAX +49 (0) 8333/9204-49
MAIDA INTERNATIONAL (LATIN AMERICA & ASIA) • 516-676-3079 • FAX 516-676-3199